


SPECIFICATIONS

General Data		Unit	FEATURES
Overall Dimensions	Ø209 x 114	mm	Stamp Steel Basket
Nominal Power Handling	300	W	Polyethylene Cone, Butyl Rubber Surround
Maximum Power	900	W	Polyethylene Dust Cap
Sensitivity	88	dB	High Temperature Voice Coil
Frequency Response	45~2000	Hz	Ferrite Magnet Structure
Cone Material	Polyethylene		<div style="text-align: center;">Dimensions</div> 
Basket	Steel		
Net Weight	3.65	kg	
Electrical Data			
Nominal Impedance	4 / 2x4	Ohm	
DC Resistance	3.2 / 2x3.2	Ohm	
Voice Coil and Magnet Parameters			
Voice Coil Diameter	44.7	mm	
Voice Coil Height	22	mm	
Magnetic Gap Height	8	mm	
Voice Coil Robbin	AL		
Number of Layers	4L		
T-S Parameters			
Suspension Compliance	186.481 µM/N / 197.395 µM/N	Cms	
Mechanical Q Factor	4.942 / 5.482	Qms	
Electrical Q Factor	0.368 / 0.498	Qes	
Total Q Factor	0.343 / 0.457	Qts	
Moving Mass	63.212g / 52.751g	Mms	
Eq. Cas AIR Loaded	11.25L / 11.909 L	Vas	
Resonant Frequency	46.356Hz / 49.322Hz	Fs	
Effective Piston Area	206.12cm ²	SD	

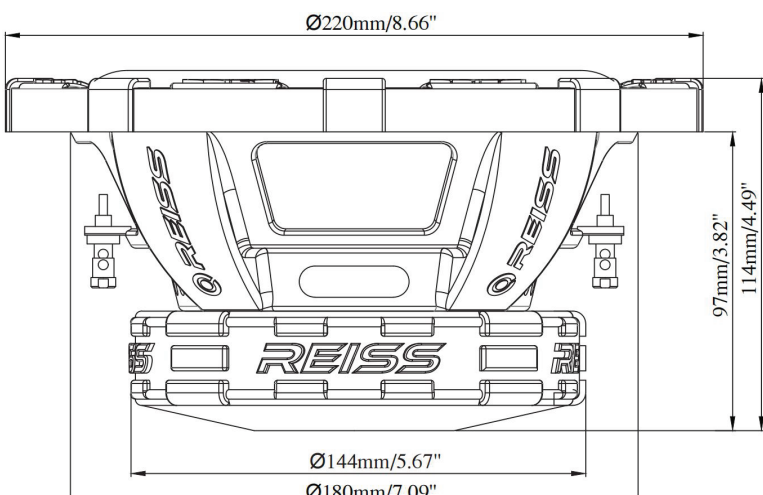