


SPECIFICATIONS

| General Data | | Unit | FEATURES |
|----------------------------------|-----------------------|------|--|
| Overall Dimensions | ! 266 x 108 | mm | Steel Basket |
| Nominal Power Handling | 300 | W | Reinforced Pulp Paper Cone, Treated Cloth Surround |
| Maximum Power | 600 | W | Dome Paper Dust Cap |
| Sensitivity | 97 | dB | High Temperature Copper Voice Coil |
| Frequency Response | 70~10000 | Hz | High Performance Ferrite Magnet Structure |
| Cone Material | Reinforced Pulp Paper | | <div style="text-align: center;">Dimensions</div>  |
| Basket | Steel | | |
| Net Weight | 4.48 | kg | |
| | | | |
| Electrical Data | | | |
| Nominal Impedance | 4 | Ohm | |
| DC Resistance | 3.2 | Ohm | |
| Voice Coil and Magnet Parameters | | | |
| Voice Coil Diameter | 50.8 | mm | |
| Voice Coil Height | 10 | mm | |
| Magnetic Gap Height | 8 | mm | |
| Voice Coil Robbin | TIL | | |
| Number of Layers | 2L | | |
| T-S Parameters | | | |
| Suspension Compliance | 191.846µM/N | Cms | |
| Mechanical Q Factor | 5.306 | Qms | |
| Electrical Q Factor | 0.537 | Qes | |
| Total Q Factor | 0.488 | Qts | |
| Moving Mass | 25.312g | Mms | |
| Eq. Cas AIR Loaded | 39.317L | Vas | |
| Resonant Frequency | 72.2245Hz | Fs | |
| Effective Piston Area | 379.9cm ² | SD | |

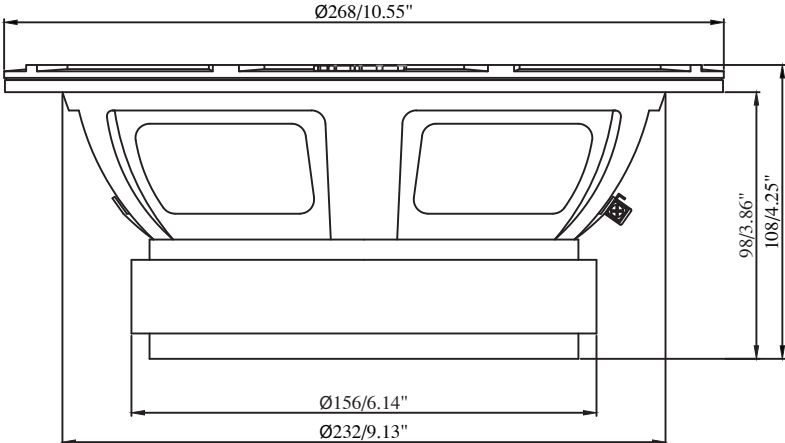