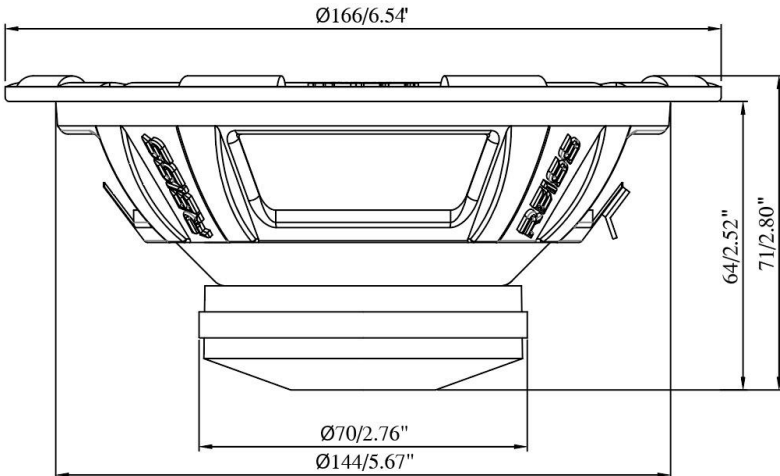
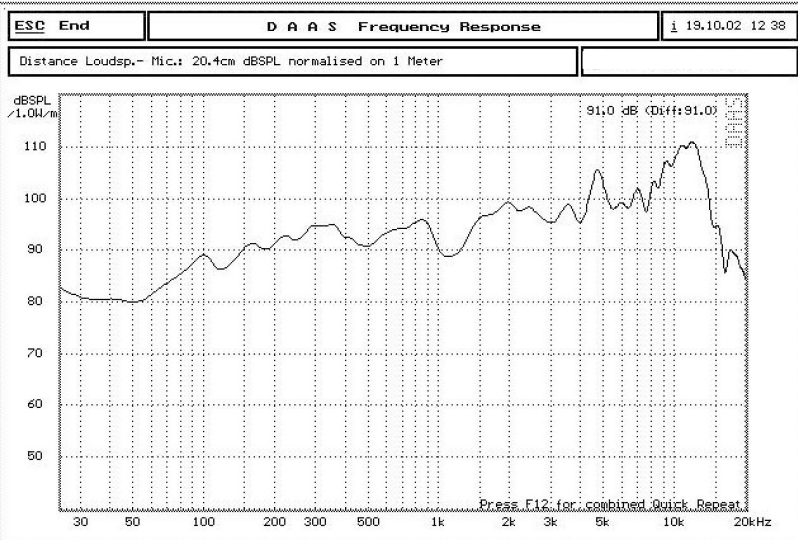


SPECIFICATIONS				
General Data			Unit	FEATURES
Overall Dimensions	Ø166x71	mm	Steel Basket Paper Cone, Treated Cloth Surround Paper Dustcap High Temperature CCAW Voice Coil Neodymium Magnet Structure	
Nominal Power Handling	145	W		
Maximum Power	290	W		
Sensitivity	95	dB		
Frequency Response	120~15000	Hz		
Cone Material	Paper		Dimensions	
Basket	Steel			
Net Weight	0.66	kg		
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3.2	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	30.5	mm		
Voice Coil Height	6.5	mm		
Magnetic Gap Height	5	mm		
Voice Coil Robbin	Kapton			
Number of Layers	2L			
T-S Parameters				
Suspension Compliance	358.835µM/N	Cms		
Mechanical Q Factor	4.963	Qms		
Electrical Q Factor	0.428	Qes		
Total Q Factor	0.394	Qts		
Moving Mass	7.475g	Mms		
Eq. Cas AIR Loaded	8.968L	Vas		
Resonant Frequency	97.179Hz	Fs		
Effective Piston Area	132.67cm²	SD		