


SPECIFICATIONS

General Data			Unit	FEATURES
Overall Dimensions	(263x183) x 116	mm		Steel Basket
Nominal Power Handling	150	W		Paper Cone With Rubber Surround
Maximum Power	300	W		1" KSV Voice Coil
Sensitivity	89	dB		High Performance 21.6 oz Ferrite Magnet
Frequency Response	50-20000	Hz		0.5" Voice Coil, Mylar Diaphragm Tweeter
Cone Material	PP			Dimensions 
Basket	Steel			
Net Weight	1.42	kg		
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3.2	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	25.9	mm		
Voice Coil Height	10	mm		
Magnetic Gap Height	4	mm		
Voice Coil Bobbin	Kapton			
Number of Layers	2L			
T-S Parameters				
Suspension Compliance	400.856 μM/N	Cms		
Mechanical Q Factor	6.104	Qms		
Electrical Q Factor	1.064	Qes		
Total Q Factor	0.906	Qts		
Moving Mass	18.871 g	Mms		
Eq. Cas AIR Loaded	28.642 Ltr	Vas		
Resonant Frequency	57.867 Hz	Fs		
Effective Piston Area	22.432 cm ²	SD		

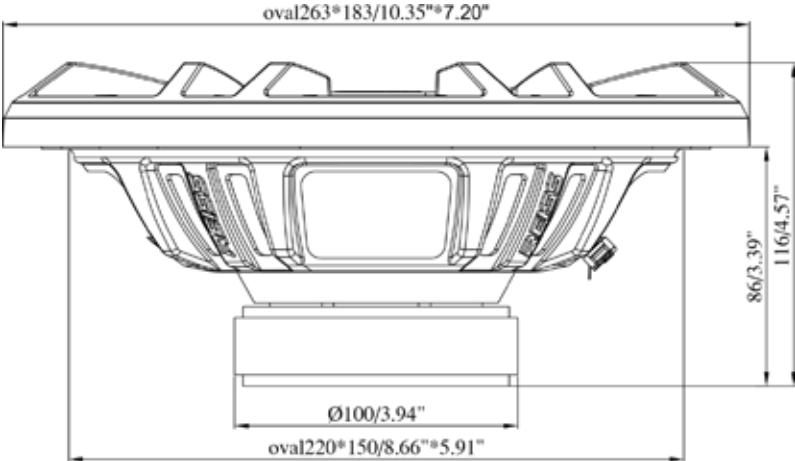