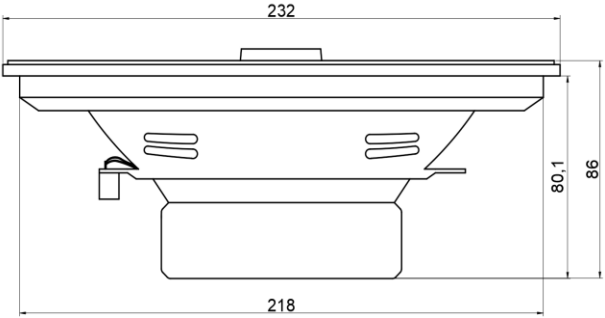
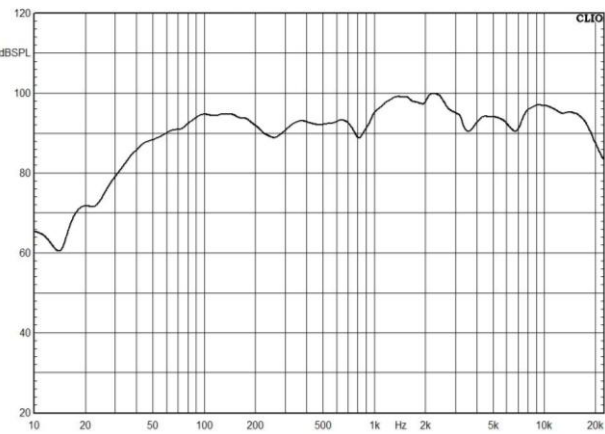


General Data		Unit	Features
Overall Dimensions	232*86	mm	6x9" COAXIAL SPEAKER
Nominal Power Handling	100	W	BLACK PP CONE WITH RUBBER EDGE
Maximum Power	250	W	IMPEDANCE:4 Ω
Sensitivity	95±2	dB	RATED POWER:100 W
Frequency Response	50-20K	Hz	MAX. POWER:250 W
Cone Material	PP		FREQUENCY RESPONSE:50-20K HZ
Basket	METAL		SENSITIVITY:95±2 DB
Net Weight	1,4	kg	<b>Dimensions</b>
<b>Electrical Data</b>			
Nominal Impedance	4	Ohm	
DC Resistance	3,2	Ohm	
<b>Voice Coil and Magnet Parameters</b>			
Voice Coil Diameter	Φ30.5	mm	
Voice coil wire	SV		
Voice Coil Height	9,5	mm	
Magnetic Gap Height	5	mm	
Magnet system type	High Flux Ferrite		
Voice Coil Bobbin	KAPTON		
Number of Layers	2L		
<b>T-S Parameters</b>			
Suspension Compliance	0,3353	Cms	
Mechanical Q Factor	8,64	Qms	
Electrical Q Factor	1,1300	Qes	
Total Q Factor	1,01	Qts	
Moving Mass	24,381	Mms	
Eq. Cas AIR Loaded	21,4069	Vas	
Resonant Frequency	55,66	Fs	
Effective Piston Area	2,14E+02	SD	