



OWNER'S MANUAL

RS-M4BW

**4" MID-RANGE SPEAKER
WITH NEODYMIUM MAGNET**

4 Ω



Turkish Engineering Since 1985

SPECIFICATIONS

Nominal Diameter	4" / 100mm
Nominal Impedance	4 OHMS
RMS Power Handling	80 Watts
MAX Power Handling	160 Watts
Sensitivity(1w/1m)	90db
Frequency Response	200~15KHZ
Recommended Lo Pass Crossover	180HZ
Pair or Single	Pair

MOTOR


Voice Coil Diameter	1" / 25.5mm
Voice Coil Former	Kapton
Winding Material	CCAW
Cone Material	Paper
Dustcap Material	Paper
Surround Material	Cloth
Magnet Material	Neodymium
Magnet Weight	2.78oz
Basket Material	Plastic
Basket Color / Finish	Black

THIELE & SMALL PARAMETERS



Vas	0.684L
Xmax	3.25 mm
Fs	194.459Hz
Qms	5.553
Qes	0.507
Qts	0.464
Mms	3.51g
Cms	190.838 μ M/N
BL	5.204 TM
Le	41.83 μ H
Sd	50.24 cm ²
Re	3.2 Ohms
Mmd	3.305g

MEASUREMENTS

Overall Diameter	119mm/4.69"
Overall Depth	88mm/3.46"
Front Mount Baffle Cutout	82mm/3.23"
Mounting Depth	37mm/1.46"
Motor Diameter	60mm/2.36"

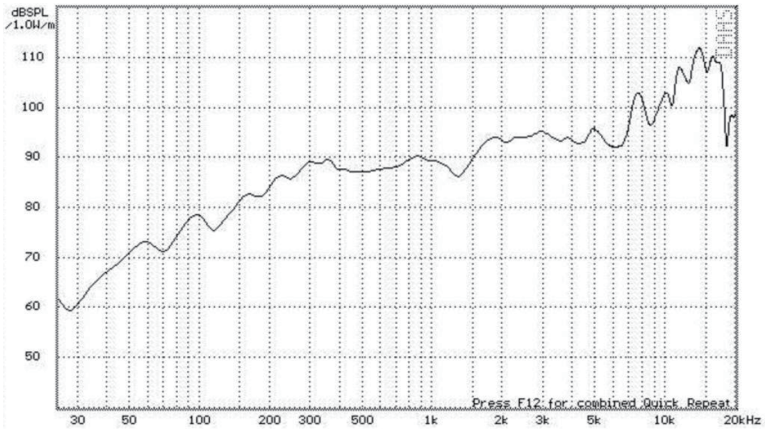

MEASUREMENTS

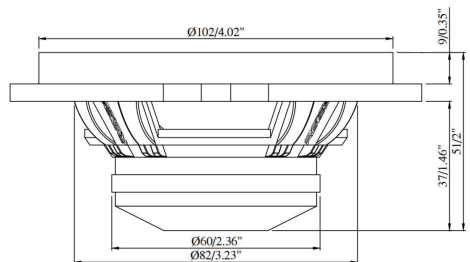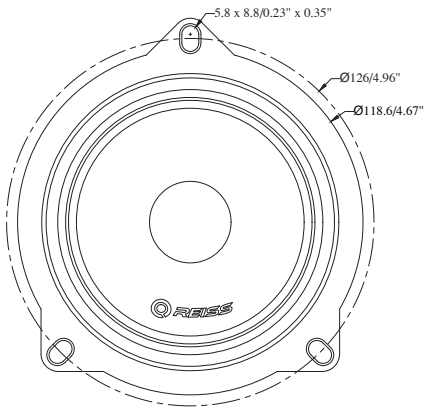



**FOR MORE INFORMATION
PLEASE VISIT
www.reissaudio.com.tr**

Turkish Engineering Since 1985

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş
İstoç Toptancılar Sitesi 15. Ada No:1-3-5-7
Mahmutbey Bağcılar / İstanbul - TÜRKİYE