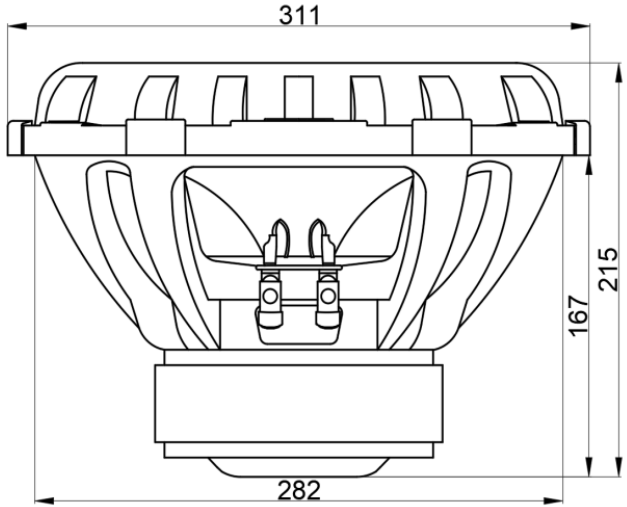
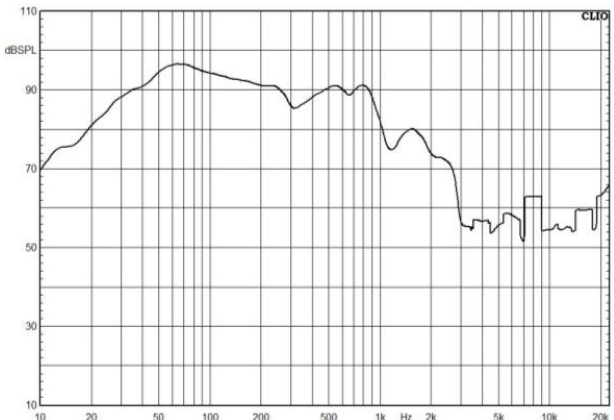


| General Data | | Unit | Features |
|---|-------------------|------|--|
| Overall Dimensions | 311*215 | mm | 12" SUBWOOFER SPEAKER |
| Nominal Power Handing | 800 | W | BLACK PAPER CONE WITH FOAM EDGE |
| Maximum Power | 2000 | W | IMPEDANCE:4+4 Ω |
| Sensitivity | 89 | dB | RATED POWER: 800 W |
| Frequency Response | 20-1200 | Hz | MAX. POWER: 2000 W |
| Cone Material | PAPER CONE | | FREQUENCY RESPONSE:20-1200 HZ |
| Basket | METAL | | SENSITIVITY:89 DB |
| Net Weight | 7,37 | kg | Dimensions |
| Electrical Data | | |  |
| Nominal Impedance | 2+2 | Ohm | |
| DC Resistance | 2+2 | Ohm | |
| Voice Coil and Magnet Parameters | | | |
| Voice Coil Diameter | Φ63.5 | mm | |
| Voice coil wire | SV | | |
| Voice Coil Height | 35 | mm | |
| Magnetic Gap Height | 10 | mm | |
| Magnet system type | High Flux Ferrite | | |
| Voice Coil Bobbin | BAL | | |
| Number of Layers | 4L | | |
| T-S Parameters | | |  |
| Suspension Compliance | 0,0526 | Cms | |
| Mechanical Q Factor | 8,95 | Qms | |
| Electrical Q Factor | 1,0600 | Qes | |
| Total Q Factor | 0,95 | Qts | |
| Moving Mass | 258,0531 | Mms | |
| Eq. Cas AIR Loaded | 16,3135 | Vas | |
| Resonant Frequency | 43,21 | Fs | |
| Effective Piston Area | 4,71E+02 | SD | |