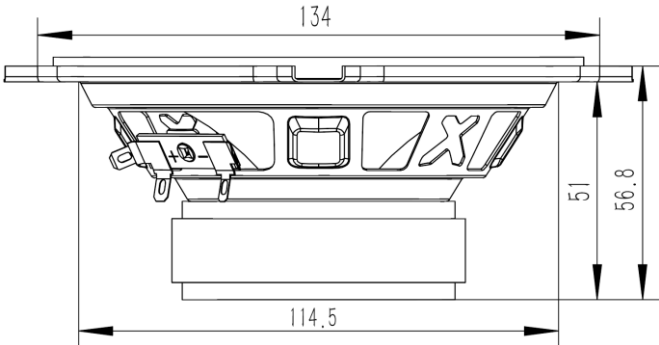
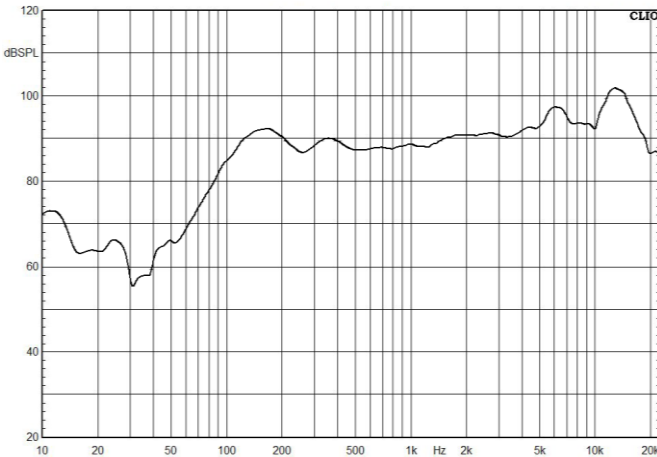


General Data			Unit	Features
Overall Dimensions	134*56.8	mm	13 CM MIDRANGE SPEAKER	
Nominal Power Handing	60	W	BLACK PAPER CONE WITH CLOTH EDGE	
Maximum Power	120	W	IMPEDANCE:4 Ω	
Sensitivity	91	dB	RATED POWER:60W	
Frequency Response	130-15K	Hz	MAX. POWER:120W	
Cone Material	PAPER CONE		FREQUENCY RESPONSE:130-15KHZ	
Basket	METAL		SENSITIVITY:91DB	
Net Weight	0,54	kg	Dimensions	
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3, 2	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	Φ25.5	mm		
Voice coil wire	CCAW			
Voice Coil Height	6	mm		
Magnetic Gap Height	4	mm		
Magnet system type	High Flux Ferrite			
Voice Coil Bobbin	KAPTON			
Number of Layers	2L			
T-S Parameters				
Suspension Compliance	0,1997	Cms		
Mechanical Q Factor	4, 61	Qms		
Electrical Q Factor	2, 11	Qes		
Total Q Factor	1, 45	Qts		
Moving Mass	4, 4309	Mms		
Eq. Cas AIR Loaded	2, 0909	Vas		
Resonant Frequency	135	Fs		
Effective Piston Area	8,66E+01	SD		