
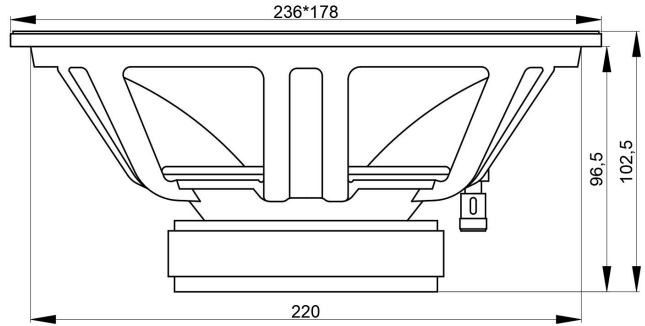


Model: SX-M69VK

6X9" MIDRANGE SPEAKER

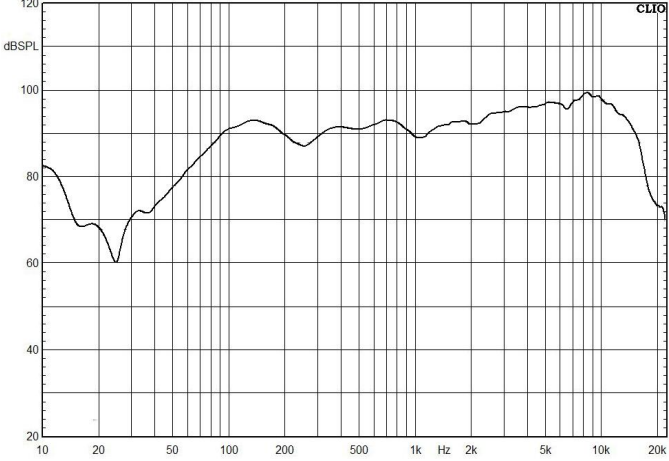

SPECIFICATIONS

General Data		Unit	Features
Overall Dimensions	236*178*102.5	mm	6X9" MIDRANGE SPEAKER
Nominal Power Handling	200	W	BLACK PAPER CONE WITH CLOTH EDGE
Maximum Power	400	W	IMPEDANCE:4Ω
Sensitivity	92	dB	RATED POWER:200W
Frequency Response	100-15K	Hz	MAX.POWER:400W
Cone Material	PAPER CONE		FREQUENCY RESPONSE:100-15KHZ
Basket	METAL		SENSITIVITY:92DB
Net Weight	1.87	kg	Dimensions
Electrical Data			
Nominal Impedance	4	Ohm	
DC Resistance	3.2	Ohm	
Voice Coil and Magnet Parameters			
Voice Coil Diameter	Φ38.6	mm	
Voice coil wire	CCA W		
Voice Coil Height	8.5	mm	
Magnetic Gap Height	6	mm	
Magnet system type	High Flux Ferrite		
Voice Coil Bobbin	KAPTON		
Number of Layers	2		
T-S Parameters			
Suspension Compliance	0.2161	Cms	
Mechanical Q Factor	5.66	Qms	
Electrical Q Factor	0.75	Qes	
Total Q Factor	0.67	Qts	
Moving Mass	14.2104	Mms	
Eq.Cas AIR Loaded	15.1843	Vas	
Resonant Frequency	90.82	Fs	
Effective Piston Area	2.24E+02	SD	

